





آموزش تنظیم مودم D-LINK مدل DSL 2740U



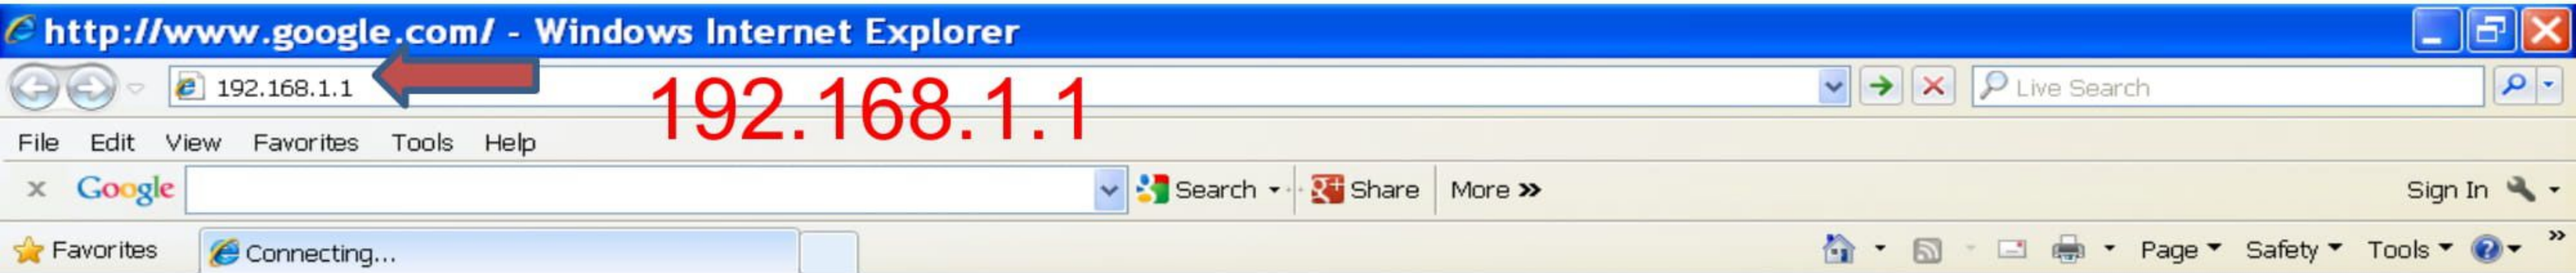

در ابتدا در قسمت نوار آدرس یکی از مرورگرهای خود (اینترنت اکسپلورر، فایرفاکس و ...) آدرس 192.168.1.1 را وارد می کنیم


Connect to 192.168.1.1



User name:

Password:

☐ Remember my password



درکادر روبرو
username:admin و
password:admin
را وارد می کنیم.



The screenshot shows the web interface of a D-Link DSL-2740U router. At the top, there is a navigation bar with four tabs: **SETUP**, **ADVANCED**, **MAINTENANCE**, and **STATUS**. The **SETUP** tab is selected, and a red arrow points to it from the logo above. On the left side, there is a sidebar menu with the following items: **Wizard**, **Local Network**, **Internet Setup**, **Wireless Setup**, and **Time and Date**. A red arrow points to the **Wizard** item. The main content area is titled **SETTING UP YOUR INTERNET** and contains the following text:

There are two ways to set up your Internet connection. You can use the Web-based Internet Connection Setup Wizard or you can manually configure the connection.

Please make sure you have your ISP's connection settings first if you choose manual setup.

Below this text is a section titled **INTERNET CONNECTION WIZARD** with the following text:

You can use this wizard for assistance and quick connection of your new D-Link Router to the Internet. You will be presented with step-by-step instructions in order to get your Internet connection up and running. Click the button below to begin.

At the bottom of this section, there is a button labeled **Setup Wizard** with a red arrow pointing to it. To the left of the button, there is Persian text: **از منوی سمت چپ گزینه wizard را انتخاب می کنیم.**

Below the button and text, there is a **Note**: Before launching the wizard, please ensure you have correctly followed the steps outlined in the Quick Installation Guide included with the router.



WELCOME TO D-LINK SETUP WIZARD

This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

- **Step 1:** Change Device Login Password
- **Step 2:** Set Time and Date
- **Step 3:** Setup Internet Connection
- **Step 4:** Configure Wireless Network
- **Step 5:** Completed and Apply

Next

Cancel



STEP 1: CHANGE DEVICE LOGIN PASSWORD → 2 → 3 → 4 → 5

To help secure your network, D-Link recommends that you should choose a new password. If you do not wish to choose a new password now, just click "Skip" to continue. Click "Next" to proceed to next step.

Current Password :

New Password :

Confirm Password :

Back

Next

Skip

Cancel

در این قسمت می توانید برای امنیت بیشتر پسورد مودم را که به صورت پیش فرض admin است را تغییر دهید و در صورت عدم تمایل به این کار skip را بزنید.

1 → **STEP 2: SET TIME AND DATE** → 3 → 4 → 5

The Time Configuration option allows you to configure, update, and maintain the correct time on the internal system clock. From this section you can set the time zone that you are in and set the NTP (Network Time Protocol) Server. Daylight Saving can also be configured to automatically adjust the time when needed.

SYSTEM TIME

System time: Sun Jan 1 1:21:15 2012

Time Zone: (GMT-00:00) Casablanca, Monrovia

DayLight: LocalTIME

Mode: Copy Computer time

در قسمت time zone گزینه
Tehran را انتخاب کنید.

Back

Next

Cancel

1 → 2 → **STEP 3: SETUP INTERNET CONNECTION** → 4 → 5


Please select your Country and ISP (Internet Service Provider) from the list below. If your Country or ISP is not in the list, please select "Others".

Country :	<input type="text" value="Others"/>	←
Internet Service Provider :	<input type="text" value="Others"/>	
Protocol :	<input type="text" value="PPPoE"/>	←
Connection Type :	<input type="text" value="LLC"/>	←
VPI : →	<input type="text" value="VPI : (Enter a number)"/>	(0-255)
VCI : →	<input type="text" value="VCI : (Enter a number)"/>	(32-65535)

PPPoE

Please enter your Username and Password as provided by your ISP (Internet Service Provider). Please enter the information exactly as shown taking note of upper and lower cases. Click "Next" to continue.

نام کاربری




Username :

پسورد



Password :

تایید مجدد پسورد



Confirm Password :

Back

Next

Cancel



1 → 2 → 3 → **STEP 4: CONFIGURE WIRELESS NETWORK** → 5

Your wireless network is enabled by default. You can simply uncheck it to disable it and click "Next" to skip configuration of wireless network.

☒ **Enable Your Wireless Network**

Your wireless network needs a name so it can be easily recognized by wireless clients. For security purposes, it is highly recommended to change the pre-configured network name.

Wireless Network Name (SSID) : (1~32 characters)

نام انتخابی برای وایرلس

Select "Visible" to publish your wireless network and SSID can be found by wireless clients, or select "Invisible" to hide your wireless network so that users need to manually enter SSID in order to connect to your wireless network.

Visibility Status :

☒ Visible

☐ Invisible

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

Security Level :

☐ None

☐ WEP

☐ WPA-PSK

☒ WPA2-PSK

Security Mode: WPA-PSK

Select this option if your wireless adapters support WPA-PSK.

Now, please enter your wireless security key.

WPA2 Pre-Shared Key :

(8-63 characters, such as a~z, A~Z, or 0~9, i.e. '%Fortress123&')

Note: You will need to enter the same key here into your wireless clients in order to enable proper wireless connection.

پسورد 8 رقم به بالا برای
وایرلس

1 → 2 → 3 → 4 → **STEP 5: COMPLETED AND APPLY**

Setup complete. Click "Back" to review or modify settings. Click "Apply" to apply current settings.

If your Internet connection does not work after apply, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.

SETUP SUMMARY

Below is a detailed summary of your settings. Please print this page out, or write the information on a piece of paper, so you can configure the correct settings on your wireless client adapters.

Time Settings :	Copy from Computer
VPI / VCI :	0/32
Protocol :	PPPoE
Connection Type :	LLC
Username :	test
Password :	test
Wireless Network :	Enabled
Wireless Network Name (SSID) :	D-Link
Visibility Status :	Visible
Encryption :	WPA2-PSK/AES (also known as WPA2 Personal)
Pre-Shared Key :	%Fortress123



Back

Apply

Cancel